

GBA17L



Main Features

Frequency	Hz	50
Voltage	V	400
Power factor	cos ϕ	0.8
Phase and connection		3

Power Rating

Standby power LTP	kVA	17.60
Standby power LTP	kW	14.08
Prime power PRP	kVA	15.77
Prime power PRP	kW	12.62

Ratings definition (According to standard ISO8528 1:2005)

PRP - Prime Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70 % of the prime power.

LTP - Limited-Time running Power:

It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 h of operation per year (whose no more than 300 for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

Engine specifications

Engine manufacturer	Lombardini	
Model	11LD 626 3L	
Version	50 Hz	
[50Hz] Exhaust emission level	Unregulated	
Engine cooling system	Air	
Nr. of cylinder and disposition	3 in line	
Displacement	cm ³	1870
Aspiration	Natural	
Speed governor	Mechanical	
Prime gross power PRP	kW	14.7
Maximum gross power LTP	kW	16.7
Oil capacity	l	5
Fuel	Diesel	
Specific fuel consumption @ 75% PRP	g/kWh	238
Specific fuel consumption @ PRP	g/kWh	238
Starting system	Electric	
Electric circuit	V	12



Alternator Specifications

Brand	Linz	
Model	E1S13ME	
Voltage	V	400
Frequency	Hz	50
Power factor	$\cos \phi$	0.8
Poles	4	
Type	Brushes	
Voltage regulation system	Compound	
Voltage tolerance	%	4
Efficiency @ 75% load	%	86.3
Class	H	
IP protection	21	



The E1S/4 series includes three-phase 4 poles alternators with brushes and compound regulation.

Mechanical structure

Robust mechanical structure which permits easy access to the connections and components during routine maintenance check-ups.

Voltage accuracy:

$\pm 4\%$ from no load to full load, $\cos \phi = 0.8$ at constant rotation speed.

Output voltage wave form:

The low harmonic content ($<5\%$) allows supplying any type of load, including distorting loads.

Short circuit current:

In case of short circuit the permanent current exceeds rated current by three times, ensuring the correct operation of protections.

Overload:


10% overload for one hour every 6 hours is normally accepted. Short overloads can be very high (three times the rated current).

Asynchronous motors starting:

1 HP per KVA of the generator can be started.

Dimensional data

Length	(L) mm	1226
Width	(W) mm	700
Height	(H) mm	1132
Dry weight	Kg	340
Fuel tank capacity	l	51

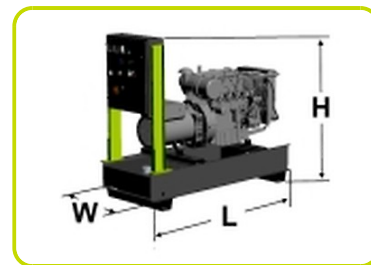

Autonomy

Running time @ 75% PRP	h	16.40
Running time @ 100% PRP	h	12.23

Data Current

Battery capacity	Ah	70
MAX current	A	25.40
Circuit breaker	A	25

Control panel availability

MANUAL CONTROL PANEL	MCP
AUTOSTART CONTROL PANEL	AST

MCP - Manual control panel

Manual control panel, mounted on the genset and complete of: instrumentation, control, protection and sockets

INSTRUMENTATION (ANALOGUE)

- Voltmeter (1 phase)
- Hours-counter



COMMANDS AND OTHERS

- Start selector switch with key



PROTECTIONS

- Alarm Battery charger failure
- Alarm low oil pressure
- Circuit breaker protection

OUT PUT PANEL MCP

3P+N+T CEE 400V 32A	n	1
2P+T CEE 230V 16A	n	1



ACP - Automatic control panel

AUTOSTART CONTROL PANEL (AST)

Control panel manual, with remote start (AST), complete with engine protection unit MC01 and instrumentation for control and protection of the generating set.

INSTRUMENTATION (ANALOGUE)

- Voltmeter (1 phase)
- Hours-counter

COMMANDS AND OTHERS

- Start selector switch with key (OFF - ON – START)
- Emergency stop button.
- Remote start capability via socket complete of two meters wiring (external device not supplied)

PROTECTION WITH ALARM

- Battery charger failure
- Low oil pressure

PROTECTIONS WITH SHUTDOWN

- Battery charger failure
- Low oil pressure
- Circuit breaker protection: III poles

OUT PUT PANEL ACP

2P+T CEE 230V 16A	n	1
3P+N+T CEE 400V 32A	n	1
Remote start capability via socket (AST)		



Accessories

Items available as accessory equipment

RES - Residential silencer

FEC - Flexible Exhaust Compensator Bellow and flanges

